


CPU-161-17 Development Kit

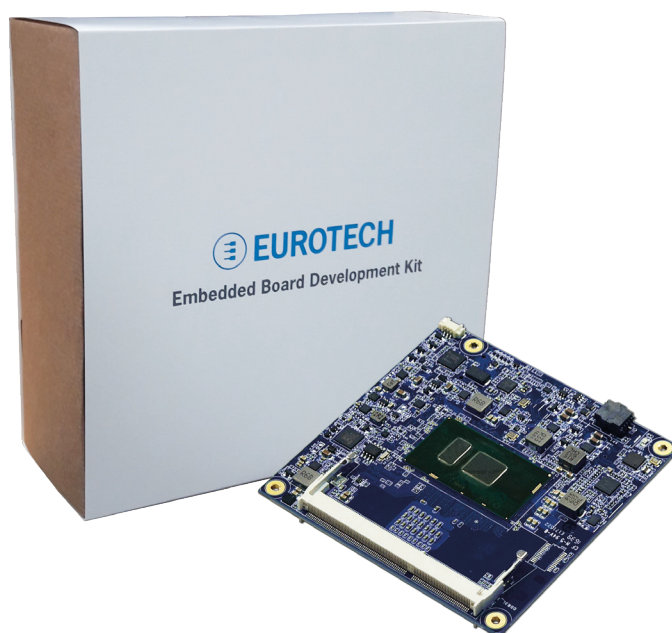

FEATURES

COM Express Launchpad - A COM Express Type 6 Development Kit that provides a complete platform for development, validation and testing of the CPU-161-17

All Inclusive - Bundles one COM Express module, one microATX carrier board and a complete set of cables and accessories, including the operating system preinstalled on an SSD drive

Rugged and Efficient - The CPU-161-17 supports wide operating temperature (-40 to +85°C) and it is powered by Intel Core i7, i5, i3 and Celeron CPUs, up to two cores and 15W TDP

Feature Rich - Provides a carrier board with plenty of interfaces, including triple display, one Gbit Ethernet, three PCIe x1 slots, two Mini PCIe sockets, and three SATA 3.0 ports

Professional Services - Constitutes the first step for Eurotech Professional Services, that range from carrier board development to complete system design, certification and manufacturing

The CPU-161-17 Development Kit allows a quick development and prototyping of embedded applications on a pre-validated platform which brings out a rich set of the module functionalities. The kit targets all aspects of an embedded application from hardware interfacing to development of on-board software.

Compliant with PICMG COM Express R2.1, Type 6, the CPU-161-17 is a 95x95mm (Compact) form factor module based on the 6th Generation Intel Core processor family (i7, i5, i3 and Celeron), with two cores and up to 16GB SO-DIMM RAM.

Other features include high speed interfaces: one Gbit Ethernet, three SATA 3.0 with RAID support, four USB 3.0 and eight USB 2.0, eight PCIe Gen 3 lanes, and three independent video ports (LVDS, VGA and DDI supporting up to 4096x2304@60Hz).

The CPU-161-17 is a solid building block for projects where reliability in harsh conditions is mandatory, and long term availability is a must, thanks to an operating temperature of -40 to +85°C, support for RAID 0/1/5, optional conformal coating and long term support/lifecycle programs.

CPU-161-17 Development Kit

Specifications

Embedded Board Development Kit

Ordering code: CPU-161-17-XX-DK01			
XX		-01	-03
PROCESSOR	CPU	Celeron 3955U 2.0GHz, 2 Cores	Core i7 6600U 2.6GHz (3.4GHz), 2 Cores
MEMORY	RAM	2x SODIMM Sockets - Up to 16GB DDR3L 1600MHz - Dual Channel	
STORAGE	SATA	2x SATA 3.0 (up to 6Gb/s)	3x SATA 3.0 (up to 6Gb/s)
I/O INTERFACES	Ethernet	1x 10/100/1000Mbps - RJ45	
	USB	4x USB 2.0/3.0, 4x USB 2.0 - Type A	
	Serial	2x UART (TX/RX) - Header 4x RS-232 (9 Wires) - Header	
	Video	Triple Independent Displays 1x LVDS [§] - Header 1x VGA - Header 1x DisplayPort	
	Audio	HD Audio 1x Line-In, 1x Line-out, 1x Mic-in - 3.5mm Jack 1x Front Audio - Header 1x S/PDIF - Header	
	PCI Express	3x PCIe x1 (Gen 3) Slots 2x Full/Half Size Mini PCIe Slots (PCIe Signal Only)	
OTHER	RTC	Yes (Lithium 3V 210mAh Battery)	
	Fan Conn.	1x CPU Fan, 1x System Fan	
	LEDs	1x SATA Activity, 1x Debug	
	Buttons	1x Power-on, 1x Reset	
POWER	Input	12V (DC-in, Screw-lock Jack)	

For more specifications and certifications, please check the CPU-161-17 datasheet

PRE-INSTALLED SOFTWARE	
OS	CentOS 7

INCLUDED ACCESSORIES		
CARRIER BOARD		CAR-363-13 Micro ATX COM Express Carrier Board
MEMORY	RAM	2x 2GB DDR3L SODIMM Modules
STORAGE	SSD	1x 2.5" 64GB SATA SSD MLC
I/O INTERFACES	SATA	3x SATA 3.0 Data Cables 1x SATA Power Cable
	Serial	1x LPC to Serial RS-232 Expansion Module 4x Serial DB9 Male Cables
	Video	1x DP Male to HDMI Female Adapter 1x VGA Cable
POWER SUPPLY	DC-DC PSU	1x 150W DC-DC ATX Power Supply Unit
	AC-DC PSU	1x 100W 100/240VAC-in 12VDC-out (Jack Conn. with Screw) Level VI Power Supply Unit
	Cables	3x Power Cables (US, JP, EU, UK)
OTHER	Heatsink	1x Heatsink

Note: The information in this document is subject to change without notice and should not be construed as a commitment by EUROTECH. While reasonable precautions have been taken, EUROTECH assumes no responsibility for any error that may appear in this document. All trademarks or registered trademarks are the properties of their respective companies. § LVDS Support requires BIOS customization.